



F20 Pixel Light Specifications

Product Overview

1. Control Method: External Control
2. Driver IC: WS2811S
3. IP Grade: IP68
4. 20mm pixel light is for 30mm shell, adopts the slow decay, high brightness imported chips as its light source.
5. A polygonal wall, hotel / club / KTV places such as teardrop-shaped ceilings, decorative heighten the atmosphere.
6. Buildings, advertising wall signs, festivals and other decorative urban areas since its lighting effects.
7. Building castles iconic buildings, bridges, parks and other contours outline, from the decorative lighting effect.



Mechanical Dimensions (Unit:mm)

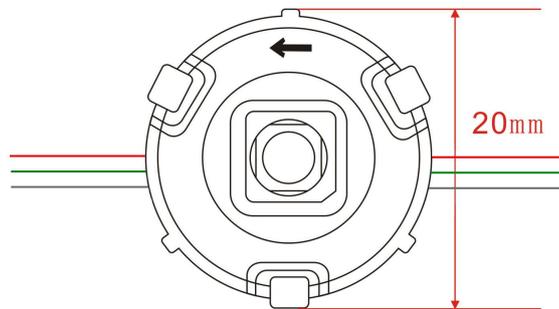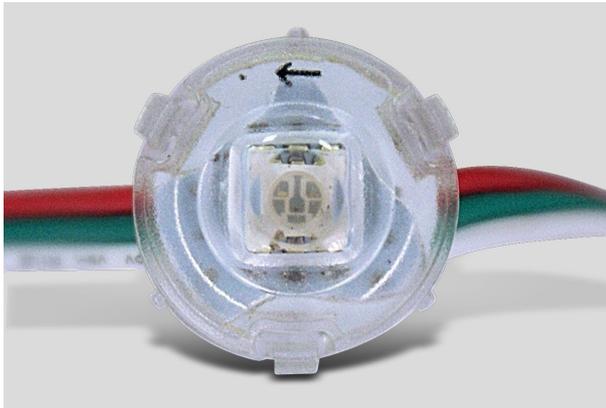

Electrical Parameters

Working Voltage	5V	Outlook Dimension	Round Diameter 20mm
Max. Power Consumption	0.3W/pcs	LED Q'ty	50pcs per string or Customized
Driven Method	Constant Current Driven	LED Type	SMD5050RGB
Working Temperature	-20°C ~ 50°C	Signal Transfer	WS2811S: Series Transfer
Lifespan	>10000 Hours		

F20 Pixel Light Specifications

Wire Connection

