



#### Features

- Constant Voltage PWM style output with frequency 1KHz
- · Plastic housing with class II design
- · Built-in active PFC function
- No load power consumption<0.5W(Blank-Type)</li>
- · IP67 rating for indoor or outdoor installations
- Function options: 2 in 1 dimming (dim-to-off);
   Auxiliary DC output
- 3 years warranty


# Applications

- · LED strip lighting
- · Indoor LED lighting
- · LED decorative lighting
- · LED architecture lighting

## Description

ODLV-45 series is a 45W AC/DC LED driver featuring the constant voltage mode PWM style output design. ODLV-45 operates from  $90\sim295$ VAC and offers models with different rated voltage ranging between 12V and 60V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for  $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$  case temperature under free air convection. The design of plastic housing and IP67 ingress protection level allows this series to fit indoor wet applications. ODLV-45 is equipped with various function options, such as dimming methodologies, so as to provide the design flexibility for LED lighting system.

## Model Encoding

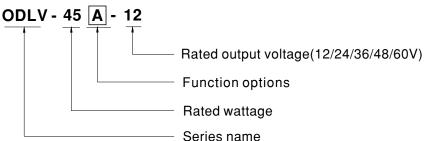


Туре	Function	Note
Blank	2 in 1 dimming (0~10VDC and 10V PWM)	In Stock
Α	2 in 1 dimming and Auxiliary DC output	In Stock

# SPECIFICATION

MODEL		ODLV-45□-12	ODLV-45□-24	ODLV-45□-36	ODLV-45□-48	ODLV-45□-60	
	DC VOLTAGE	12V	24V	36V	48V	60V	
OUTPUT	RATED CURRENT	3.0A	1.88A	1.25A	0.94A	0.75A	
	RATED POWER	36W	45.12W	45W	45.12W	45W	
	DIMMING RANGE	0~100%					
	VOLTAGE TOLERANCE	±10%					
	PWM FREQUENCY (Typ.)	1KHz(±20%)					
	SETUP TIME Note.3	500ms / 230VAC 1200ms/115VAC					
	AUXILIARY DC OUTPUT Note.4	Nominal 12V(deviation 11.4~12.6)@50mA for A-Type only					
INPUT	VOLTAGE RANGE Note.2	90 ~ 295VAC 127 ~ 417VDC (Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF>0.95/115VAC, PF>0.92/230VAC, PF>0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)					
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VAC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION" section)					
	EFFICIENCY (Typ.)	84%	86%	88%	88%	90%	
	AC CURRENT (Typ.)	0.6A / 115VAC					
	INRUSH CURRENT(Typ.)	COLD START 30A(twidth=150µs measured at 50% Ipeak) at 230VAC; Per NEMA 410					
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	32 units (circuit breaker of type B) / 32 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	<0.75mA/277VAC					
	NO LOAD POWER CONSUMPTION	<0.5W for Blank-Type, <1.2W for A-Type					
PROTECTION	SHORT CIRCUIT	Shut down O/P voltage, re-power on to recovery					
	OVED CURRENT	105 ~ 115%  Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	OVER CURRENT						
ENVIRONMENT	WORKING TEMP.	Tcase=-20 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+85°C					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 NO.250.13-12; ENEC EN61347-1 & EN61347-2-13 independent, EN62384, GB19510.1, GB19510.14; IP67 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (@load ≥ 60%) ; EN61000-3-3,GB17743,GB17625.1					
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity:Line-Line:1KV)					
OTHERS	MTBF	388.02K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	111*77*28.5mm (L*W*	<sup>t</sup> H)				
	PACKING	0.42Kg;24pcs/11Kg/0	0.72CUFT				
NOTE	De-rating may be needed u     Length of set up time is me     There is no design of short are short circuit or when it i     The driver is considered as	Illy mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.  under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.  easured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time.  circuit protection for the Auxiliary DC output; this function can not be used when dimming input terminals(DIM+,DIM-) is no load or short circuit at output(Vo+,Vo-).  Ea component that will be operated in combination with final equipment. Since EMC performance will be installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					




#### ■ DIMMING OPERATION

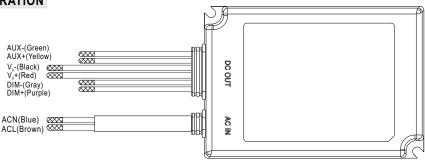

#### ※ Dimming principle for PWM style output

• Dimming is achieved by varying the duty cycle of the output current.

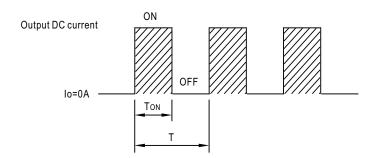


Duty cycle(%) = 
$$\frac{TON}{T}$$
 ×100%

Output PWM frequency: 1KHz(±20%)

#### X 2 in 1 dimming function


Applying additive 0 ~ 10VDC

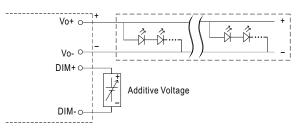


"DO NOT connect "DIM- to Vo-"

100% 90% 80% 70% 60% 40% 0V 1V 2V 3V 4V 5V 6V 7V 8V 9V 10V Dimming input: Additive voltage

Applying additive 10V PWM signal (frequency range 300~3000Hz):

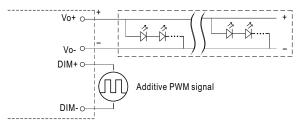


"DO NOT connect "DIM- to Vo-"



Note: 1. Min. duty cycle of output current is about 8% and the output current is not defined when 0%< Iout<8%.


2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.



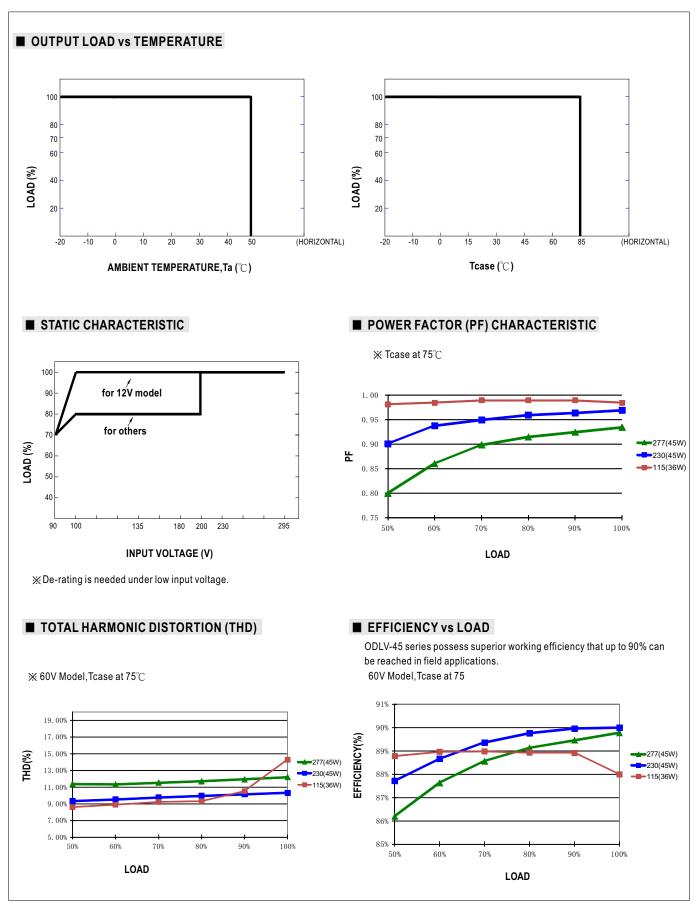


## ■ BLOCK DIAGRAM

fosc: 70~150KHz

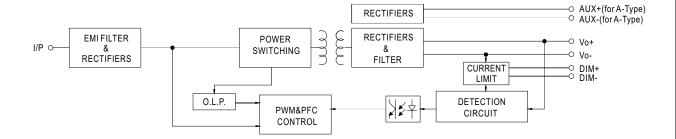

## ■ DRIVING METHODS OF LED MODULE

\* This series work in Constant Voltage mode to drive the LEDs.

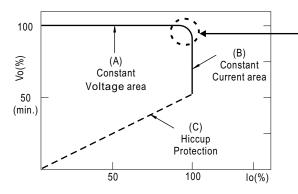

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



