



# Capacitors

Ceramic Capacitor

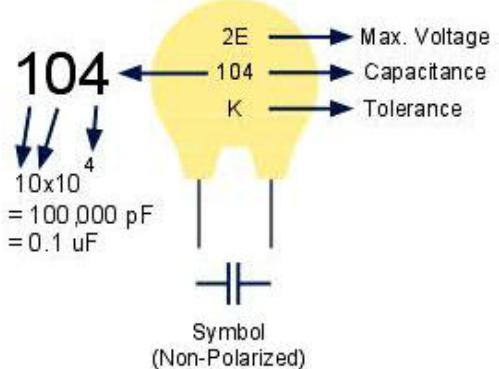

Electrolytic Capacitor

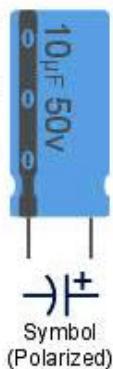

## Max. Operating Voltage

Code	Max. Voltage
1H	50V
2A	100V
2T	150V
2D	200V
2E	250V
2G	400V
2J	630V

## Capacitance Conversion Values



Microfarads ( $\mu\text{F}$ )
0.000001 $\mu\text{F}$
0.00001 $\mu\text{F}$
0.0001 $\mu\text{F}$
0.001 $\mu\text{F}$
0.01 $\mu\text{F}$
0.1 $\mu\text{F}$
1 $\mu\text{F}$
10 $\mu\text{F}$
100 $\mu\text{F}$

Nanofarads (nF)
0.001 nF
0.01 nF
0.1 nF
1 nF
10 nF
100 nF
1,000 nF
10,000 nF
100,000 nF

Picofarads (pF)
1 pF
10 pF
100 pF
1,000 pF
10,000 pF
100,000 pF
1,000,000 pF
10,000,000 pF
100,000,000 pF

## Tolerance

Code	Percentage
B	$\pm 0.1 \text{ pF}$
C	$\pm 0.25 \text{ pF}$
D	$\pm 0.5 \text{ pF}$
F	$\pm 1\%$
G	$\pm 2\%$
H	$\pm 3\%$
J	$\pm 5\%$
K	$\pm 10\%$
M	$\pm 20\%$
Z	+80%, -20%

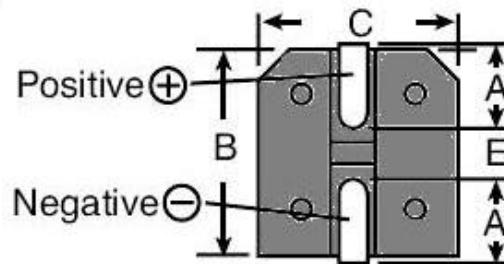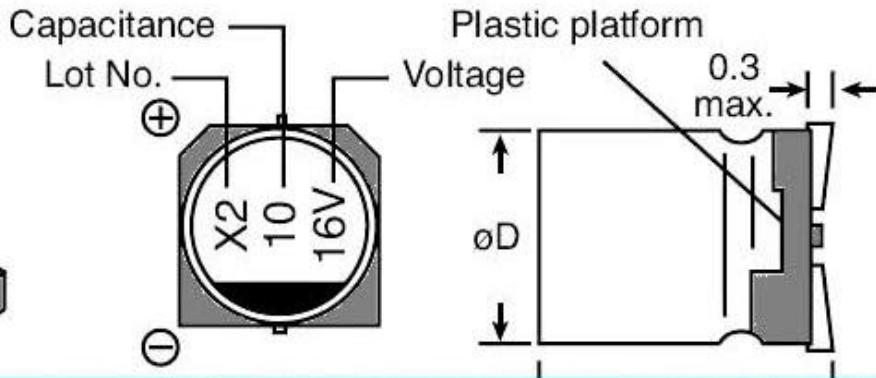

(+) plus (+) plus (+) plus (-) minus (-) minus (-)



(-) minus (-) minus (-)