

Continental Device India Limited

An ISO/TS 16949, ISO 9001 and ISO 14001 Certified Company






SILICON DIAC
BIDIRECTIONAL TRIGGER DIODE
GLASS PASSIVATED PNPN DEVICE

CLLDB3

SOD - 80C Mini MELF (LL-34)



Functioning as a Trigger Diode with a Fixed Voltage Reference, CLLDB3 can be used in Conjunction with Triacs for Simplified Gate Control Circuits or as a Starting Element in Fluorescent Lamp Ballasts

ABSOLUTE MAXIMUM RATINGS (T_a=25°C unless specified otherwise))

| DESCRIPTION | | SYMBOL | VALUE | UNIT |
|---|------------------|--------------------|--------------|------|
| Power Dissipation on Printed Circuit (L=10mm) (T _a = | P_{tot} | 150 | mW | |
| Up to $T_a = 50$ °C and Mounted on a Ceramic Substrat 10mm x 0.6mm | P _{tot} | 120 | mW | |
| Repetitive Peak on-State Current (t _p =20ms, f=100Hz) | | I _{TRM} 2 | | Α |
| Storage Temperature Range | | T _{stg} | - 40 to +125 | °C |
| Junction Temperature Range | | T _j | - 40 to +110 | °C |
| THERMAL RESISTANCE | | | | |
| Junction to Ambient in free air | $R_{th(j-a)}$ | | 400 | °C/W |
| Junction-Leads | $R_{th(j-l)}$ | | 150 | °C/W |

ELECTRICAL CHARACTERISTICS (T_i=25°C unless specified otherwise)

| DESCRIPTION | SYMBOL | TEST CONDITIONS | MIN | MAX | UNIT |
|-----------------------------|---|--|---------|------------|------|
| * Breakover Voltage | V_{BO} | ** C = 22nF | 28 | 36 | V |
| | | see diagram 1 | | | |
| Breakover Voltage Symmetry | [I+V _{BO} I-I-V _{BO} I] | ** C = 22nF | | <u>+</u> 3 | V |
| | | see diagram 1 | | | |
| * Dynamic Breakover Voltage | ΙΔV <u>+</u> Ι | Δ 1=[I _{BO} to I _F =10mA] | 5 | | V |
| | | see diagram 1 | | | |
| * Output Voltage | Vo | see diagram 2 | 5 | | V |
| * Breakover Current | I _{BO} | ** C = 22nF | | 50 | μΑ |
| * Rise Time | t _r | see diagram 3 | TYP 1.5 | | μs |
| * Leakage Current | I _B | $V_B = 0.5 V_{BO} \text{ max}$ | | 10 | μΑ |
| | | see diagram 1 | | | |

^{*} Electrical characteristic applicable in both forward and reverse directions

^{**} Connected in parallel with the devices.

CLLDB3

DIAGRAM 1: Current-voltage characteristics




DIAGRAM 2: Test circuit for output voltage








DIAGRAM 3 : Test circuit see diagram 2. Adjust R for Ip=0.5A











SOD - 80C Mini MELF (LL-34)

SOD 80C (LL-34) Mini MELF Hermetically Sealed Glass Package

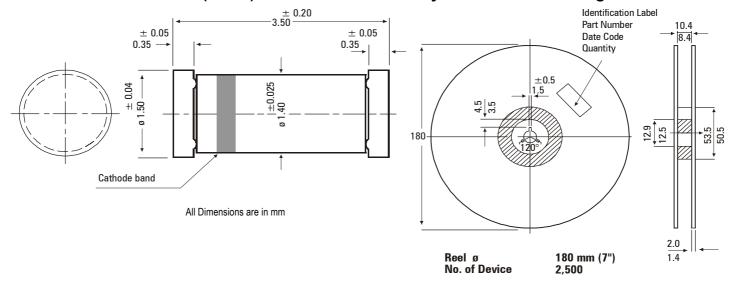

TAPE & REEL




Notes:

 Maximum of 0.5% of the total number of components per reel may be missing-exclusively at the beginning and at the end of the reel.

All Dimensions are in mm

A maximum of three consecutive components may be missing, provided this gap is followed by six consecutive components.

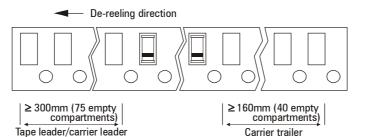

All Dimensions are in mm

Drawings are not to scale

Packing Detail

| PACKAGE | STANDARD PACK | | INNER CARTON BOX | | OUTER CARTON BOX | | |
|-------------|---------------|-----------------|------------------|-----|------------------------------------|-------------|---------------------|
| | Details | Net Weight/Qty | Size | Qty | Size | Qty | Gr Wt |
| SOD-80C T&R | 2.5K/reel | 225 gm/2.5K pcs | 9" x 9" x 9" | 40K | 18" x 12" x 10" 19" x 19" x 20" | 80K 320K | 7.2 kgs 28.8 kgs |

CLLDB3 SOD - 80C Mini MELF (LL-34)

Component Disposal Instructions

- 1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
- 2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Customer Notes

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com

eman@cun.com www.cunsem.c