

**RoHS  
Compliant**



## Features

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes

## Mechanical Data

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Approx. Weight: 0.009 grams

Maximum Ratings @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic	Symbol	Value	Unit
Max. Forward Voltage @ $I_F = 10\text{mA}$	$V_F$	0.9	V
Junction Temperature (Note 1)	$P_{(AV)}$	500	mW
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

### Note:

1. Mounted on  $5\text{mm}^2$  (0.013mm thick) land areas


## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

Part Number	Marking	Normal Zener Voltage	Test Current	Max. Zener Impedance		Max. Reverse Leakage Current		Max. Zener Voltage Temp.
		$V_Z@I_{ZT}$	$I_{ZT}$	$Z_{ZT}@I_{ZT}@I_{ZK}=0.25\text{mA}$		$I_R@V_R$		
		Volts	mA	$\Omega$	$\Omega$	$\mu\text{A}$	Volts	
MMSZ5232B+	E2	5.6	20	11	1600	5	3	+0.038
MMSZ5234B+	E4	6.2	20	7	1000	5	4	+0.045
MMSZ5236B+	F1	7.5	20	6	500	3	6	+0.058
MMSZ5237B+	F2	8.2	20	8	500	3	6.5	+0.062
MMSZ5242B+	H2	12	20	30	600	1	9.1	+0.077
MMSZ5248B+	J3	18	7	21	600	0.1	14	+0.085
MMSZ5252B+	K2	24	5.2	33	600	0.1	18	+0.088


### Note:

1. Standard Zener voltage tolerance is  $\pm 5\%$  with a "B" suffix (e.g.: MMSZ5225B)
2. Specials Available Include:
  - A. Nominal zener voltages between the voltages shown and tighter voltage tolerances.
  - B. Matched sets.
3. Zener Voltage ( $V_Z$ ) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature ( $T_L$ ) at  $30^\circ\text{C}$ , from the diode body.
4. Zener Impedance ( $Z_Z$ ) Derivation. The zener impedance is derived from the 60 cycle ac voltage, which results when an AC current having an rms value equal to 10% of the dc zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ .
5. Surge Current ( $I_R$ ) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current,  $I_{ZT}$ , per JEDEC registration.


## Rating and Characteristic Curves

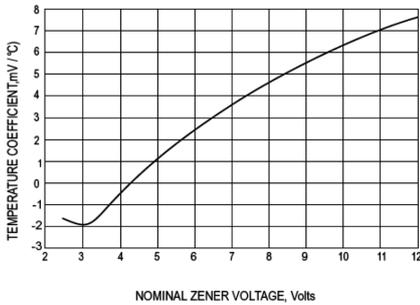


Typical Reverse Current

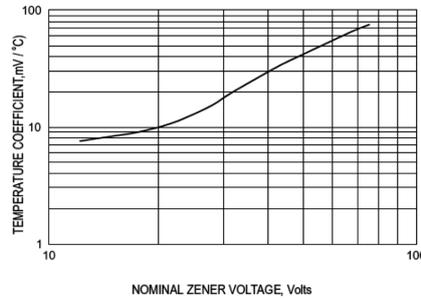


Steady State Power Derating

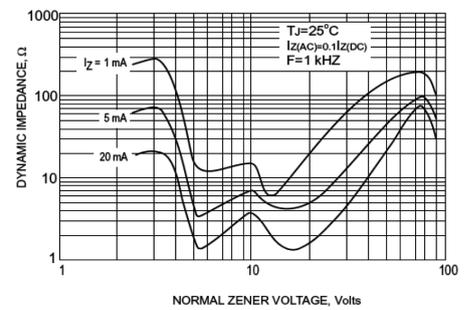


Effect of Zener Voltage on Zener Impedance

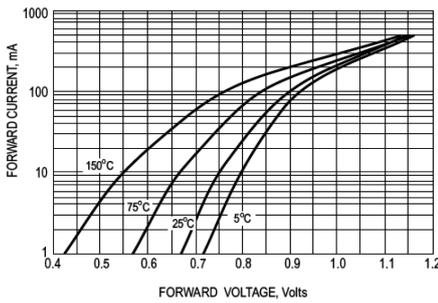


Typical Forward Voltage

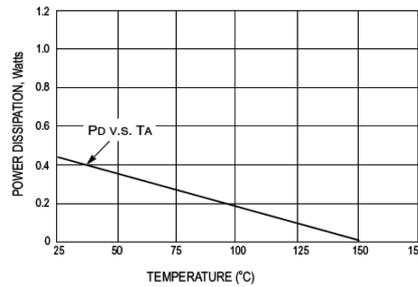


Steady State Power Derating

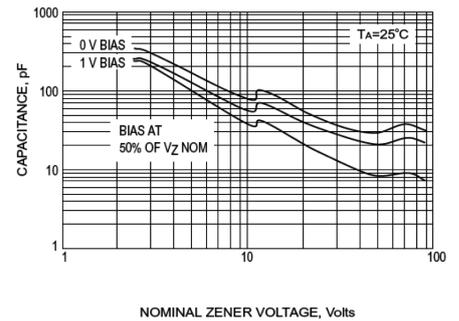


Typical Capacitance

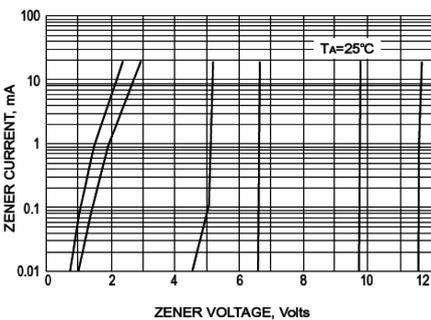

Zener Voltage Vs. Zener Current

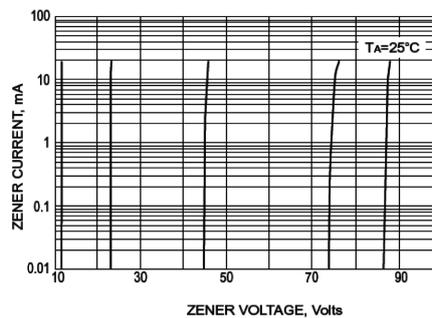


Zener Voltage Vs. Zener Current

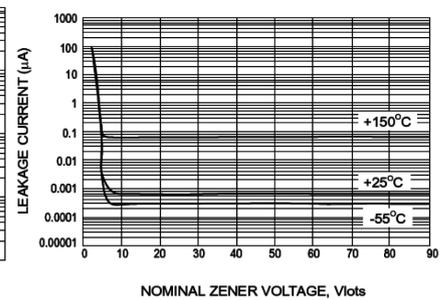

Typical Leakage Current

## Dimensions:

### SOD-123

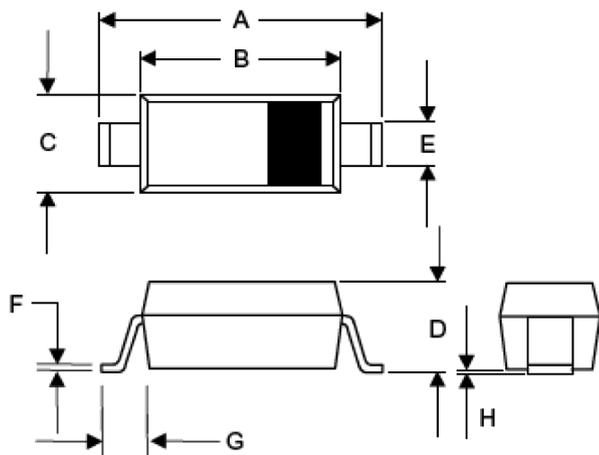

Dim.	Dimensions			
	Inches		mm	
	Min.	Max.	Min.	Max.
A	0.141	0.154	3.6	3.9
B	0.098	0.11	2.5	2.8
C	0.055	0.071	1.4	1.8
D	0.037	0.053	0.95	1.35
E	0.019	0.028	0.5	0.7
F	-	0.008	-	0.2
G	0.016	-	0.4	-
H	-	0.005	-	0.12

## Part Number Table

Description	Part Number
Zener Diode, 500mW 5.6V SOD-123	MMSZ5232B+
Zener Diode, 500mW 6.2V SOD-123	MMSZ5234B+
Zener Diode, 500mW 7.5V SOD-123	MMSZ5236B+
Zener Diode, 500mW 8.2V SOD-123	MMSZ5237B+
Zener Diode, 500mW 12V SOD-123	MMSZ5242B+
Zener Diode, 500mW 18V SOD-123	MMSZ5248B+
Zener Diode, 500mW 24V SOD-123	MMSZ5252B+

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.