# 915MHz; 25 x 25 x 4mm RFID(USA) Patch Antenna

# APAE915R2540ABDB1-T

**MSL level: Not Applicable** 





### **FEATURES:**

- Compact size
- RoHS Compliance

### **TYPICAL APPLICATIONS:**

RFID systems for Logistic & Inventory Management of Retail, Pharmaceutical, Automotive Industries; Industrial automation, Contactless smart cards.


### STANDARD SPECIFICATIONS:


Parameters	Min.	Тур.	Max.	Units	Note
Receiving Frequency Range	915.0			MHz	
Center Frequency @ -10dB bandwidth	917.0±2.0			MHz	(Center frequency is the demand frequency by customer.)
-10dB bandwidth	2			MHz	
Gain( at Zenith 90°)		4.5		dBic	(Peak gain on standardized Ground Plane)
VSWR @ Center Frequency			1.5		
Polarization Model	RHCP				(Right Hand Circular Polarization)
Frequency Temperature Coefficient			20	ppm/°C	

<sup>(\*)</sup> Application environment, including size of ground plane will affect stated performance. Fine tuning might be required when installed on customer's PCB.

### **TEST CONDITIONS & TEST SETUP:**

### **RADIATION PATTERN**

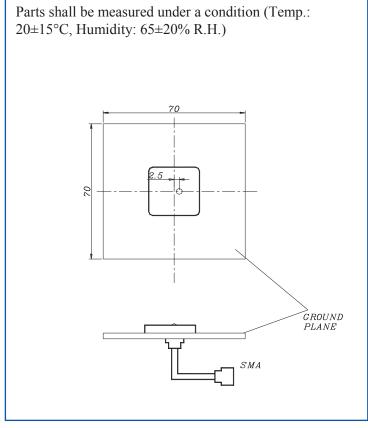

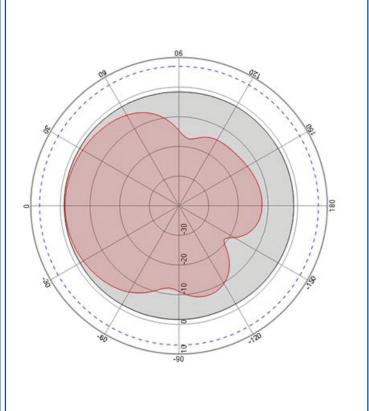






# 915MHz; 25 x 25 x 4mm RFID(USA) Patch Antenna

# APAE915R2540ABDB1-T






### **► IMPEDANCE CHARACTERISTICS**

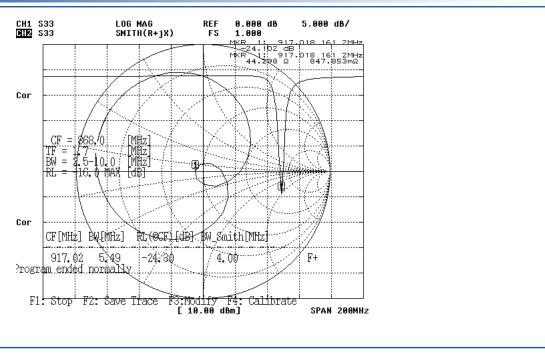

## **OUTLINE DRAWING:**

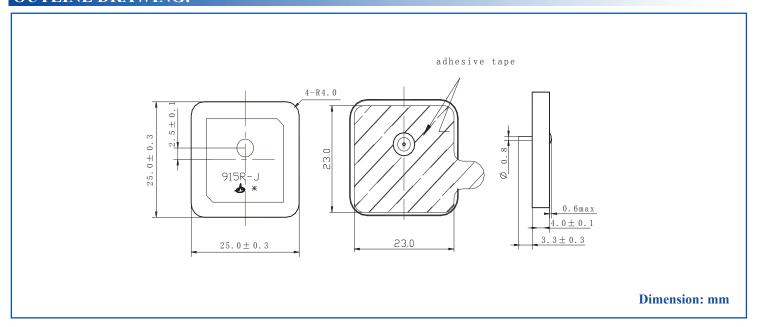





# 915MHz; 25 x 25 x 4mm RFID(USA) Patch Antenna

## APAE915R2540ABDB1-T






### **PACKAGING:**

"T" is for a vacuum sealed tray containing 50 units.

1000 pieces is the suggested quantity containing 20-trays with 50-pcs per Tray.

NOTE: This product is vacuum packaged to reduce the possibility of oxidation and/or contamination

during storage.



NO.	Name		
1	Inner Box		
2	Package		
3	Vacuum Bag		
4	Certificate of approval		
5	Label		
6	Cushion		
7	Tray		
8	Adhesive tape		

Inner Box dimensions (unit: mm)



#### **CAUTION:**

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

#### NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



