

Snap In Aluminium Electrolytic Capacitors

multicomp PRO



Features:

- 105°C high temperature resistance and ripple current resistance, high reliability.
- Suitable for wave filtering return circuit for power of equipment, such as computers.

Specifications:

Items	Characteristics																																										
Capacitance Tolerance	$\pm 20\%$ (120Hz, 20°C)																																										
Operating Temperature Range	-40°C to +105°C					-25°C to +105°C																																					
Rated Voltage Range	10 ~ 250V					350 ~ 450V																																					
Leakage Current	$I \leq 3\sqrt{CV}$ or 3000 (μ A), which is greater. (After 5 minutes application of working voltage)																																										
Dissipation Factor (tan δ)	Measurement Frequency: 120Hz. Temperature: 20°C <table border="1"><tr><td>Rated Voltage(V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td><td>160~250</td><td>350~450</td></tr><tr><td>tan δ(Max)</td><td>0.45</td><td>0.4</td><td>0.35</td><td>0.3</td><td>0.25</td><td>0.25</td><td>0.2</td><td>0.20</td><td>0.15</td><td>0.20</td></tr></table>										Rated Voltage(V)	10	16	25	35	50	63	80	100	160~250	350~450	tan δ(Max)	0.45	0.4	0.35	0.3	0.25	0.25	0.2	0.20	0.15	0.20											
Rated Voltage(V)	10	16	25	35	50	63	80	100	160~250	350~450																																	
tan δ(Max)	0.45	0.4	0.35	0.3	0.25	0.25	0.2	0.20	0.15	0.20																																	
Low Temperature Stability Impedance Ratio(Max)	Measurement Frequency: 120Hz. <table border="1"><tr><td>Rated Voltage(V)</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63~100</td><td>160~250</td><td>350~450</td><td></td><td></td></tr><tr><td>Z(-25°C) /Z(20°C)</td><td>6</td><td>6</td><td>4</td><td>4</td><td>4</td><td>4</td><td>4</td><td>4</td><td>8</td><td></td></tr><tr><td>Z(-40°C) /Z(20°C)</td><td>16</td><td>15</td><td>10</td><td>10</td><td>8</td><td>6</td><td>6</td><td>15</td><td>-</td><td></td></tr></table>										Rated Voltage(V)	10	16	25	35	50	63~100	160~250	350~450			Z(-25°C) /Z(20°C)	6	6	4	4	4	4	4	4	8		Z(-40°C) /Z(20°C)	16	15	10	10	8	6	6	15	-	
Rated Voltage(V)	10	16	25	35	50	63~100	160~250	350~450																																			
Z(-25°C) /Z(20°C)	6	6	4	4	4	4	4	4	8																																		
Z(-40°C) /Z(20°C)	16	15	10	10	8	6	6	15	-																																		
Load Life	2000 hours, with application of working voltage at 105°C <table border="1"><tr><td>Capacitance Change</td><td colspan="9">Within $\pm 20\%$ of Initial Value</td><td></td></tr><tr><td>tan δ</td><td colspan="9">200% or less of Initial Specified Value</td><td></td></tr><tr><td>Leakage Current</td><td colspan="9">Initial Specified Value or less</td><td></td></tr></table>										Capacitance Change	Within $\pm 20\%$ of Initial Value										tan δ	200% or less of Initial Specified Value										Leakage Current	Initial Specified Value or less									
Capacitance Change	Within $\pm 20\%$ of Initial Value																																										
tan δ	200% or less of Initial Specified Value																																										
Leakage Current	Initial Specified Value or less																																										
Shelf Life	1000 hours, no voltage applied, at 105°C. After Test : U_R to be applied for 30 minutes, 24 to 48 hours before measurement. <table border="1"><tr><td>Capacitance Change</td><td colspan="9">Within $\pm 15\%$ of Initial Value</td><td></td></tr><tr><td>tan δ</td><td colspan="9">200% or less of Initial Specified Value</td><td></td></tr><tr><td>Leakage Current</td><td colspan="9">Initial Specified Value or less</td><td></td></tr></table>										Capacitance Change	Within $\pm 15\%$ of Initial Value										tan δ	200% or less of Initial Specified Value										Leakage Current	Initial Specified Value or less									
Capacitance Change	Within $\pm 15\%$ of Initial Value																																										
tan δ	200% or less of Initial Specified Value																																										
Leakage Current	Initial Specified Value or less																																										
Standards	JIS C 5141 and JIS C 5102																																										

Permissible Ripple Current

Temperature Coefficient

TEMP. (°C)	45	60	85	105
Coefficient	2.5	2.2	1.65	1

multicomp PRO



Frequency Coefficient

WV (V)	Frequency (Hz)				
	50	120	1K	10K	100K
10~100	0.88	1	1.15	1.15	1.2
160~250	0.85	1	1.15	1.2	1.2
350~450	0.88	1	1.1	1.15	1.2

Scope

This specification applies to aluminium electrolytic capacitor, used in electronic equipment

Electrical Characteristics

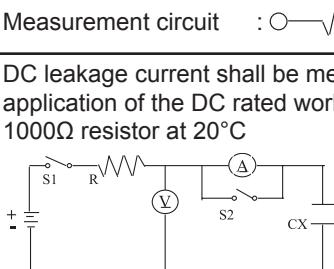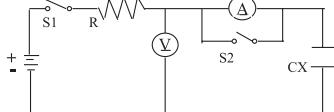Item	Test Method	Specification															
Rated Voltage		Voltage range, capacitance range, see specification of this series.															
Capacitance	Measuring frequency : $120 \pm 12\text{Hz}$ Measuring voltage : $\leq 0.5\text{Vrms} + 0.5 \sim 2\text{V DC}$	Voltage range, capacitance range, see specification of this series.															
Dissipation factor	Measurement circuit : 	Dissipation factor, leakage current, see specification of this series.															
Leakage current	DC leakage current shall be measured after 1~2 minutes application of the DC rated working voltage through the 1000Ω resistor at 20°C  R : $1000 \pm 100\Omega$ S1 : Switch A : DC current meter S2 : Switch for protect of current meter V : DC voltage meter CX : Testing capacitor	Dissipation factor leakage current, see specification of this series.															
Temperature characteristics	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Storage Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$20 \pm 2^\circ\text{C}$</td> <td>30 minutes</td> </tr> <tr> <td>2</td> <td>$-40 \pm 3^\circ\text{C}$</td> <td>2 hours</td> </tr> <tr> <td>3</td> <td>$20 \pm 2^\circ\text{C}$</td> <td>15 minutes</td> </tr> <tr> <td>4</td> <td>$105 \pm 2^\circ\text{C}$</td> <td>2 hours</td> </tr> </tbody> </table> <p>Step 1. Measure the capacitance and impedance. (Z_{r0}) (Z, 20°C, $120\text{Hz} \pm 10\%$) Step 2. Measure the impedance at thermal balance after 2 hours. (Z, 20°C, $120\text{Hz} \pm 10\%$) Step 4. Measure the capacitance and leakage current at thermal balance after 2 hours.</p>	Step	Temperature	Storage Time	1	$20 \pm 2^\circ\text{C}$	30 minutes	2	$-40 \pm 3^\circ\text{C}$	2 hours	3	$20 \pm 2^\circ\text{C}$	15 minutes	4	$105 \pm 2^\circ\text{C}$	2 hours	Step 2. Impedance ratio (Z_r / Z_{r0}) less than specified value. Step 4. Capacitance change : within $\pm 20\%$ of the initial measured value. Leakage current : Less than 10 times of initial specified value .
Step	Temperature	Storage Time															
1	$20 \pm 2^\circ\text{C}$	30 minutes															
2	$-40 \pm 3^\circ\text{C}$	2 hours															
3	$20 \pm 2^\circ\text{C}$	15 minutes															
4	$105 \pm 2^\circ\text{C}$	2 hours															

Item	Test Method	Specification
Surge test	Rated surge voltage shall be applied (switch on) for 30 ± 5 seconds and then shall be applied (switch off) with discharge for 5 ± 0.5 min at room temperature . This cycle shall be repeated for 1000 cycles. Duration of one cycle is 6 ± 0.5 minutes .	Capacitance change : within $\pm 20\%$ of the initial specified value. Dissipation factor : less than 200% of the initial specified value. Leakage current : within initial specified value.
Applicable Ripple Current	The maximum A.C. current having frequency of 100k Hz which can be applied to the capacitor at $105 \pm 2^\circ\text{C}$ continuously. Peak voltage not to exceed rated D.C. voltage.	

Mechanical characteristics

Lead strength	(A) Tensile strength : wire lead terminal : <table border="1"> <tr> <td>d (mm)</td><td>≤ 0.45</td><td>$0.5 \sim 0.8$</td><td>$0.8 < d \leq 1.25$</td></tr> <tr> <td>Load (kg)</td><td>0.51</td><td>1</td><td>2</td></tr> </table> Snap-in terminal <table border="1"> <tr> <td>d (mm)</td><td>snap-in terminal</td></tr> <tr> <td>Load (kg)</td><td>2</td></tr> </table> The capacitor shall withstand the constant tensile force specified between the body and each lead for 10 seconds without damage either mechanical or electrical. (B) Bending strength : wire lead terminal : <table border="1"> <tr> <td>d (mm)</td><td>≤ 0.45</td><td>$0.5 \sim 0.8$</td><td>$0.8 < d \leq 1.25$</td></tr> <tr> <td>Load (kg)</td><td>0.25</td><td>0.51</td><td>1</td></tr> </table> Snap-in terminal <table border="1"> <tr> <td>Cross section area of terminal</td><td>Force (kg)</td></tr> <tr> <td>$0.5 < S \leq 1$</td><td>1</td></tr> <tr> <td>$S > 1$</td><td>2.5</td></tr> </table> With the capacitor in a vertical position apply the load specified axially to each lead. The capacitor shall be rotated slowly from the vertical to the horizontal position, back to the vertical position. The 90° in the opposite direction and back the original position. Performance of capacitor shall not have changed and leads shall be undamaged	d (mm)	≤ 0.45	$0.5 \sim 0.8$	$0.8 < d \leq 1.25$	Load (kg)	0.51	1	2	d (mm)	snap-in terminal	Load (kg)	2	d (mm)	≤ 0.45	$0.5 \sim 0.8$	$0.8 < d \leq 1.25$	Load (kg)	0.25	0.51	1	Cross section area of terminal	Force (kg)	$0.5 < S \leq 1$	1	$S > 1$	2.5	When the capacitance is measured, there shall be no intermittent contacts, or open- or short-circuiting. There shall be no such mechanical damage as terminal damage etc.
d (mm)	≤ 0.45	$0.5 \sim 0.8$	$0.8 < d \leq 1.25$																									
Load (kg)	0.51	1	2																									
d (mm)	snap-in terminal																											
Load (kg)	2																											
d (mm)	≤ 0.45	$0.5 \sim 0.8$	$0.8 < d \leq 1.25$																									
Load (kg)	0.25	0.51	1																									
Cross section area of terminal	Force (kg)																											
$0.5 < S \leq 1$	1																											
$S > 1$	2.5																											
Vibration resistance	The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 1.5mm, completing the cycle in the internal of one minute. The capacitor shall be securely mounted by its leads with hold the body of capacitor. The capacitor shall be vibrated in three mutually perpendicular directions for a period of 2 hours in each direction .	Capacitance : no unsteady. Appearance : no abnormal. Capacitance change : within $\pm 5\%$ of initial measured value .																										
Solderability	The leads are dipped in the solder bath of Sn at $260 \pm 5^\circ\text{C}$ for 2 ± 0.5 seconds . The dipping depth should be set at $1.5 \sim 2\text{mm}$.	The solder alloy shall cover the 95% or more of the dipped lead's area .																										

Reliability


Item	Test Method	Specification														
Soldering heat resistance	The leads immerse in the solder bath of Sn at $260 \pm 5^\circ\text{C}$ for 10 ± 1 seconds until a distance of $1.5 \sim 2\text{mm}$ from the case.	No damage or leakage of electrolyte. Capacitance change : within $\pm 10\%$ of the initial measured value. $\tan \delta$: less than specified value. Leakage current : less than specified value.														
Damp heat (Steady state)	Subject the capacitors to $40 \pm 2^\circ\text{C}$ and 90% to 95% relative humidity for 240 ± 8 hours.	Capacitance change : within $\pm 10\%$ of the initial measured value. $\tan \delta$: less than specified value. Leakage current : less than specified value.														
Load life	After X hours continuous application of DC rated working voltage at $105 \pm 2^\circ\text{C}$, the measurements shall meet the following limits. Measurements shall be performed after 2 hours exposed at room temperature.	Standard of judgement is according to requirement of this series.														
Shelf life	After storage for Y hours at $105 \pm 2^\circ\text{C}$ without voltage application , the measurements shall meet the following limits. Measurements shall be performed after exposed for 1 to 2 hrs at room temperature after application of DC rated voltage to the capacitor for Z minutes .															
Storage at Low Temperature	The capacitor shall be stored at temperature of $-40 \pm 3^\circ\text{C}$ for 240 ± 8 hours, during which time no voltage shall be applied. And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours or more, after which measurements shall be made.	Capacitance change : within $\pm 10\%$ of the initial value. $\tan \delta$: less than specified value. Leakage current : less than specified value Appearance : no abnormal.														
Pressure relief	AC test Applied voltage : AC voltage not exceeding 0.7 times of the rated direct voltage or 250 V AC whichever is the lower. Frequency : 50Hz or 60Hz Series resistor : refer to the table below <table border="1"> <thead> <tr> <th>Capacitance (C)</th> <th>Series resistor</th> </tr> </thead> <tbody> <tr> <td>$C \leq 1\mu\text{F}$</td> <td>1000Ω</td> </tr> <tr> <td>$1\mu\text{F} < C \leq 10\mu\text{F}$</td> <td>$100\Omega$</td> </tr> <tr> <td>$10\mu\text{F} < C \leq 100\mu\text{F}$</td> <td>$10\Omega$</td> </tr> <tr> <td>$100\mu\text{F} < C \leq 1000\mu\text{F}$</td> <td>$1\Omega$</td> </tr> <tr> <td>$1000\mu\text{F} < C \leq 10000\mu\text{F}$</td> <td>$0.1\Omega$</td> </tr> <tr> <td>$10000\mu\text{F} < C$</td> <td>*</td> </tr> </tbody> </table> * Resistance is equivalent to a half impedance by test frequency.	Capacitance (C)	Series resistor	$C \leq 1\mu\text{F}$	1000Ω	$1\mu\text{F} < C \leq 10\mu\text{F}$	100Ω	$10\mu\text{F} < C \leq 100\mu\text{F}$	10Ω	$100\mu\text{F} < C \leq 1000\mu\text{F}$	1Ω	$1000\mu\text{F} < C \leq 10000\mu\text{F}$	0.1Ω	$10000\mu\text{F} < C$	*	AC test circuit <p> $\textcircled{\text{w}}$: AC power \textcircled{S} : Switch \textcircled{V} : AC voltage meter \textcircled{A} : AC current meter R : Protection Resistor Cx : Testing Capacitor </p>
Capacitance (C)	Series resistor															
$C \leq 1\mu\text{F}$	1000Ω															
$1\mu\text{F} < C \leq 10\mu\text{F}$	100Ω															
$10\mu\text{F} < C \leq 100\mu\text{F}$	10Ω															
$100\mu\text{F} < C \leq 1000\mu\text{F}$	1Ω															
$1000\mu\text{F} < C \leq 10000\mu\text{F}$	0.1Ω															
$10000\mu\text{F} < C$	*															

: AC power

Item	Test Method	Specification
Pressure relief	<p>DC test</p> <p>Send the following electricities while applying the inverse voltage .</p> <p>Where case size (D diameter)</p> <p>D ≤ 22.4 mm : 1 A DC max.</p> <p>D > 22.4 mm : 10 A DC max.</p> <p>Note : 1. This requirement applies to capacitors with a diameter of 6 mm or more .</p>	<p>DC test circuit</p> <p>S : Switch (A) : DC current meter Cx : Testing Capacitor</p>

MCKLZ Series

Dimensions:

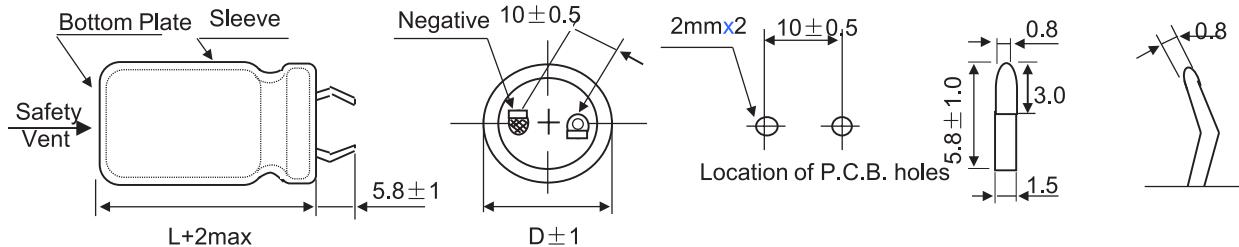

Standard Ratings

D×L(mm); R.C.(A rms) at 105°C, 120Hz; IMP (Ω max)

Cap (uF)	WV (V)	10			16			25			35			50								
		Item	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP					
1500															22×25	1.2	0.268					
1800															22×30	1.4	0.222					
2200															22×30	25×25	1.6	0.182				
2700												22×25	1.21	0.174	22×35	25×30	1.73	0.148				
3300												22×30	1.36	0.142	22×40	25×30	1.97	0.123				
3900												22×25	1.35	0.137	22×30	1.57	0.12	22×45	25×35	2.23	0.104	
4700												22×30	1.58	0.114	22×35	25×25	1.77	0.098	22×50	25×40	2.45	0.086
5600												22×30	1.75	0.096			1.99	0.083	25×45	30×35	2.74	0.074

Snap In Aluminium Electrolytic Capacitors

multicomp PRO

Cap (uF)	WV (V)	10			16			25			35			50			
		Item	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP
6800						22×25	1.8	0.098	22×35 25×30	2.02	0.079	22×45 25×35	2.29	0.069	30×40 35×30	3.31	0.069
8200						22×30 25×25	2.08	0.082	22×40 25×35	2.18	0.066	22×50 25×40	2.58	0.057	30×45 35×35	3.6	0.05
10000		22×25	1.88	0.077		22×35			22×45			25×45			35×40	4.02	0.046
12000		22×30 25×25	2.18	0.068		22×40 25×30	2.31	0.056	22×50 25×45	2.86	0.05	25×50 30×40	3.24	0.046	35×50	4.52	0.039
15000		22×35 25×30	2.27	0.055		22×45 25×35	2.69	0.045	25×50 30×40	3.15	0.04	30×45 35×35	3.65	0.037			
18000		22×40 25×30	2.41	0.048		22×50 25×40	3.2	0.042	30×45 35×35	3.55	0.038	35×40 30×50 35×50	4.13	0.03			
22000		22×45 25×35	2.68	0.045		25×45 30×35	3.4	0.04	30×50 35×40	4	0.034		4.78	0.025			
27000		25×40 30×35	3.17	0.04		30×40 35×35	3.85	0.035	35×45	4.55	0.03						
33000		25×45 30×35	3.39	0.036		30×50 35×40	4.32	0.025	35×50	5.56	0.024						
39000		25×50 30×40	3.72	0.033		35×40	4.85	0.023									
47000		30×45 35×35	4.22	0.03		35×50	5.56	0.02									
56000		35×40	5.00	0.019													
68000		35×50	5.21	0.016													

Standard Ratings

D×L(mm) ; R.C.(A rms) at 105°C, 120Hz; IMP (Ω max)

Cap (uF)	WV (V)	63			80			100			160			200			
		Item	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP
150															22×25	0.82	1.05
220											22×25	1.04	0.738	22×30	1.07	0.738	
330											22×30	1.26	0.605	22×30 25×25	1.2	0.605	
390											22×30 25×25	1.29	0.514	22×35 25×30	1.34	0.514	
470											22×35 25×30	1.56	0.426	22×40 25×30	1.48	0.426	
560								22×25	1.02	0.476	22×40 25×30	1.69	0.357	22×45 25×35	1.65	0.356	

multicomp PRO

Snap In Aluminium Electrolytic Capacitors

multicomp PRO

Cap (uF)	WV (V)	63			80			100			160			200		
		Item	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.
680								22×30	1.12	0.393	22×45 25×35	1.72	0.294	25×40 30×30	1.75	0.293
820					22×25	1.04	0.326	22×30 25×25	1.32	0.324	22×50 25×40	1.99	0.246	25×50 30×35	2.04	0.245
1000					22×30	1.21	0.275	22×35 25×30	1.45	0.268	25×45 30×35	2.2	0.202	30×45 35×35	2.30	0.202
1200		25×25	1.21	0.276	22×35 25×25	1.29	0.227	22×40 25×35	1.68	0.223	30×40 35×35	2.45	0.168	30×50 35×40	2.65	0.167
1500	22×30	1.45	0.223		22×40 25×30	1.57	0.186	22×45 25×40	1.98	0.177	30×50 35×40	3.06	0.138	35×45	2.98	0.134
1800	22×35	1.59	0.187		22×45 25×35	1.72	0.155	25×45 30×35	2.23	0.148	35×45	3.14	0.112			
2200	22×40	1.84	0.158		25×40 30×30	2.01	0.133	25×45 30×40	2.53	0.123	35×50	3.5	0.093			
2700	22×45	2.12	0.126		25×45 30×35	2.32	0.099	30×45 35×35	2.82	0.098						
3300	25×40	2.30	0.102		30×40 35×30	2.62	0.086	30×50 35×40	3.32	0.081						
3900	25×45	2.42	0.087		30×45 35×35	2.84	0.070	35×45	3.62	0.068						
4700	25×50	2.91	0.075		30×50	3.29	0.068	35×40	3.8	0.058						
5600	30×45	3.18	0.06		35×45	3.82	0.048									
6800	35×50	3.54	0.05		35×50	3.92	0.038									
8200	35×45	3.82	0.042		35×50	4.05	0.033									
10000	35×51	4.5	0.033		35×60	4.2	0.027	35×70	4.8	0.02						
12000					35×95	4.4	0.024									

multicomp PRO

Snap In Aluminium Electrolytic Capacitors



multicomp PRO

Standard Ratings

D×L(mm) ; R.C.(A rms) at 105°C, 120Hz; IMP (Ω max)

Cap (uF)	WV (V)	250			350			400			450		
		Item	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.	IMP	D×L	R.C.
68								22×25	0.52	4.880	22×35 25×30	0.55	4.880
82					22×25	0.60	3.233	22×30 22×25	0.66	4.047	22×35 25×30	0.65	4.047
100				22×30 22×25	0.69	2.654	22×35 25×25	0.72	3.318	25× 25 25×35	0.75	3.318	
120				22×35 25×30	0.76	2.215	22×40 25×30	0.75	2.766	22×45 25×40	0.83	2.766	
150	22×25	0.76	1.328	22×40 25×30	0.79	1.770	22×25 22×30	0.89	2.214	22×50 25×30	0.95	2.214	
180	22×30	0.98	1.106	22×45 25×35	0.88	1.475	22×50 25×40	0.98	1.842	25×45 30×40	1.15	1.842	
220	22×30 25×25	1.09	0.905	22×50 25×40	0.98	1.208	25×35 25×40	1.12	1.506	25×45 25×40	1.24	1.506	
270	22×35 25×30	1.19	0.738	25×45 30×35	1.10	0.984	25×40 25×50	1.29	1.230	30×50 25×45	1.46	1.230	
330	22×40 22×30	1.35	0.605	30×40 35×35	1.22	0.806	30×40 35×35	1.45	1.015	30×50	1.45	1.115	
390	22×45 25×35	1.52	0.512	30×45 35×40	1.42	0.681	30×50 35×40	1.59	0.847	35×55	1.78	0.852	
470	22×50 25×40	1.63	0.425	35×45	1.62	0.567	30×50	1.75	0.710	35×50	1.86	0.682	
560	25×45 30×35	1.84	0.357	35×50	1.89	0.473	35×50	2.12	0.588				
680	25×50 30×40	2.05	0.294	35×50	2.10	0.420	35×50	2.20	0.485	35×55	2.30		
820	30×45 35×35	2.29	0.246	35×65	2.35	0.352	35×65	2.50	0.412				
1000	35×40	2.49	0.201										
1500	35×50	2.95	0.15										

Structure and Materials

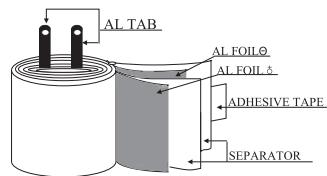

multicomp PRO

Part Number Table

Description	Dia. x Length	Part Number
Snap In Aluminium Electrolytic Capacitor, 63V, 10000µF, ± 20%	35mm × 51mm	MCKLZ063M103P51Y
Snap In Aluminium Electrolytic Capacitor, 63V, 4700µF, ± 20%	35mm × 35mm	MCKLZ063M472P35Y
Snap In Aluminium Electrolytic Capacitor, 63V, 6800µF, ± 20%	35mm × 50mm	MCKLZ063M682P50Y
Snap In Aluminium Electrolytic Capacitor, 100V, 4700µF, ± 20%	35mm × 40mm	MCKLZ100M472P40Y
Snap In Aluminium Electrolytic Capacitor, 250V, 330µF, ± 20%	22mm × 30mm	MCKLZ250M331M30Y
Snap In Aluminium Electrolytic Capacitor, 400V, 220µF, ± 20%	25mm × 35mm	MCKLZ400M221N35Y
Snap In Aluminium Electrolytic Capacitor, 400V, 220µF, ± 20%	25mm × 40mm	MCKLZ400M221N40Y
Snap In Aluminium Electrolytic Capacitor, 400V, 270µF, ± 20%	25mm × 40mm	MCKLZ400M271N40Y
Snap In Aluminium Electrolytic Capacitor, 400V, 270µF, ± 20%	25mm × 50mm	MCKLZ400M271N50Y
Snap In Aluminium Electrolytic Capacitor, 400V, 330µF, ± 20%	30mm × 40mm	MCKLZ400M331O40Y
Snap In Aluminium Electrolytic Capacitor, 400V, 470µF, ± 20%	30mm × 50mm	MCKLZ400M471O50Y
Snap In Aluminium Electrolytic Capacitor, 400V, 680µF, ± 20%	35mm × 50mm	MCKLZ400M681P50Y
Snap In Aluminium Electrolytic Capacitor, 450V, 100µF, ± 20%	25mm × 25mm	MCKLZ450M101N25Y
Snap In Aluminium Electrolytic Capacitor, 450V, 150µF, ± 20%	25mm × 30mm	MCKLZ450M151N30Y
Snap In Aluminium Electrolytic Capacitor, 450V, 220µF, ± 20%	25mm × 40mm	MCKLZ450M221N40Y
Snap In Aluminium Electrolytic Capacitor, 450V, 220µF, ± 20%	25mm × 45mm	MCKLZ450M221N45Y
Snap In Aluminium Electrolytic Capacitor, 450V, 270µF, ± 20%	25mm × 45mm	MCKLZ450M271N45Y
Snap In Aluminium Electrolytic Capacitor, 450V, 330µF, ± 20%	30mm × 50mm	MCKLZ450M331O50Y
Snap In Aluminium Electrolytic Capacitor, 450V, 470µF, ± 20%	35mm × 50mm	MCKLZ450M471P50Y
Snap In Aluminium Electrolytic Capacitor, 200V, 680µF, ± 20%	25mm × 40mm	MCKLZ200M681N40Y
Snap In Aluminium Electrolytic Capacitor, 250V, 1500µF, ± 20%	35mm × 50mm	MCKLZ250M152P50Y
Snap In Aluminium Electrolytic Capacitor, 250V, 330µF, ± 20%	22mm × 40mm	MCKLZ250M331M40Y
Snap In Aluminium Electrolytic Capacitor, 250V, 470µF, ± 20%	25mm × 40mm	MCKLZ250M471N40Y
Snap In Aluminium Electrolytic Capacitor, 250V, 680µF, ± 20%	25mm × 50mm	MCKLZ250M681N50Y
Snap In Aluminium Electrolytic Capacitor, 400V, 150µF, ± 20%	22mm × 25mm	MCKLZ400M151M25Y
Snap In Aluminium Electrolytic Capacitor, 400V, 150µF, ± 20%	22mm × 30mm	MCKLZ400M151M30Y
Snap In Aluminium Electrolytic Capacitor, 450V, 100µF, ± 20%	25mm × 35mm	MCKLZ450M101N35Y

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.