


# Ninigi


## D A T A S H E E T

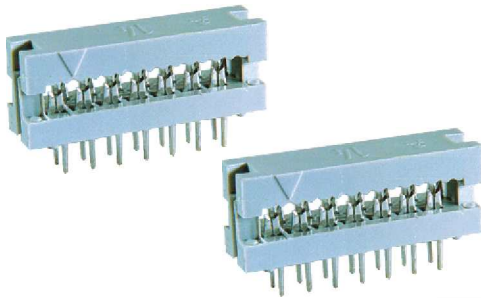

### Specification:

- 1) Operating Temperature: 0°C ~ 85°C
- 2) Contact Resistance: 20 mΩ max. (initial)
- 3) Insulation Resistance: 1000 MΩ min
- 4) Dielectric Withstanding Voltage: 1000 VAC per minute

### AWLP10B

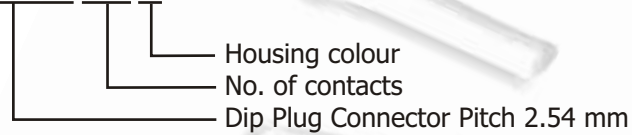


### NO. OF CONTACTS

10, 14, 16, 20, 26, 30, 34, 40, 50, 60, 64

### HOUSING COLOUR

B black  
omitted when standard colour (gray)

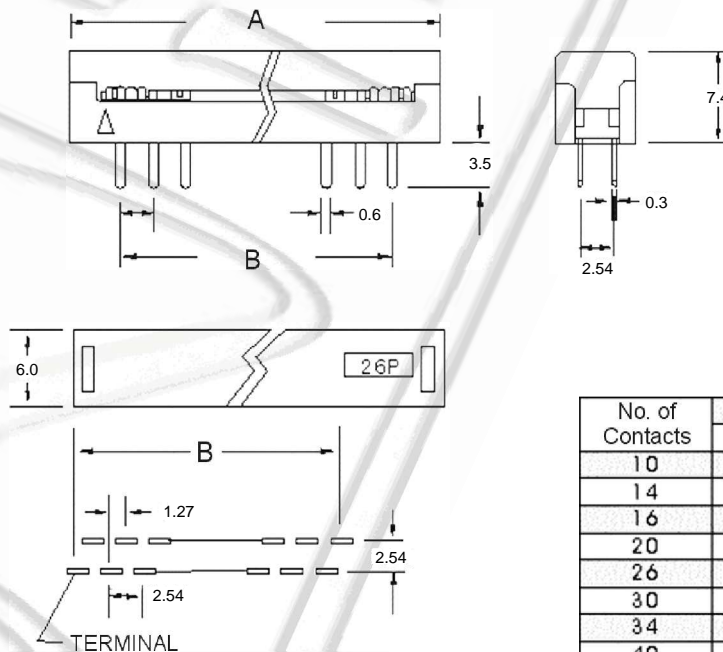

No. of Contacts	Dimension	
	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74