

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

FG

High Grade Standard Type, For Audio Equipment


series



For Audio Use

Anti-Solvent Feature

- "Fine Gold" MUSE acoustic series suited for high grade audio equipment, using state of the art etching techniques.
- Rich sound in the bass register and clearer high end, most suited for AV equipment like DVD.
- Compliant to the RoHS directive (2011/65/EU).


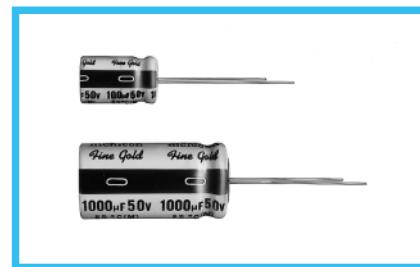


■ Specifications

Item	Performance Characteristics																																						
Category Temperature Range	-40 to +85°C																																						
Rated Voltage Range	6.3 to 100V																																						
Rated Capacitance Range	0.1 to 10000μF																																						
Capacitance Tolerance	±20% at 120Hz, 20°C																																						
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																																						
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.09</td> <td>0.08</td> </tr> </tbody> </table> For capacitance of more than 1000μF add 0.02 for every increase of 1000μF.									Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08										
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																														
tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08																														
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z00 (MAX.) Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>									Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio Z-25°C / Z+20°C	4	3	2	2	2	2	2	2	2	ZT / Z00 (MAX.) Z-40°C / Z+20°C	8	6	4	4	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																														
Impedance ratio Z-25°C / Z+20°C	4	3	2	2	2	2	2	2	2																														
ZT / Z00 (MAX.) Z-40°C / Z+20°C	8	6	4	4	3	3	3	3	3																														
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C. <table border="1"> <thead> <tr> <th>Capacitance change</th> <th>Within ±20% of the initial measurement for units of not more than 16V or φ6.3</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>Within ±15% of the initial measurement for units of not less than 25V or above φ6.3</td> </tr> <tr> <td>Leakage current</td> <td>150% or less than the initial specified value</td> </tr> <tr> <td></td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>									Capacitance change	Within ±20% of the initial measurement for units of not more than 16V or φ6.3	tan δ	Within ±15% of the initial measurement for units of not less than 25V or above φ6.3	Leakage current	150% or less than the initial specified value		Less than or equal to the initial specified value																						
Capacitance change	Within ±20% of the initial measurement for units of not more than 16V or φ6.3																																						
tan δ	Within ±15% of the initial measurement for units of not less than 25V or above φ6.3																																						
Leakage current	150% or less than the initial specified value																																						
	Less than or equal to the initial specified value																																						
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																						
Marking	Printed with black color letter on gold sleeve.																																						

■ Radial Lead Type

Type numbering system (Example : 10V 47μF)

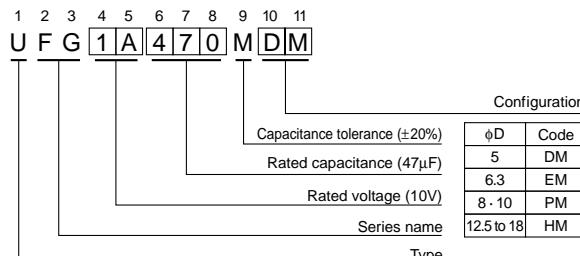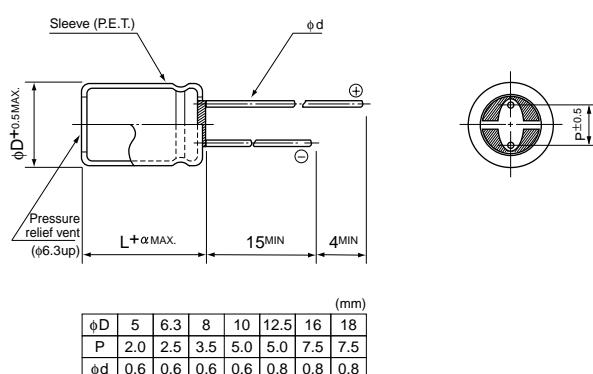

(mm)							
φD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6	0.6	0.8	0.8	0.8

α	(L < 20) 1.5
	(L ≥ 20) 2.0

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

CAT.8100C

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

FG series

■Dimensions

Cap.(μ F)	V	6.3		10		16		25		35		50	
		Code	0J	Code	1A	Code	1C	Code	1E	Code	1V	Code	1H
0.1	0R1											5x11	1.1
0.22	R22											5x11	2.4
0.33	R33											5x11	3.6
0.47	R47											5x11	5.0
1	010											5x11	9.0
2.2	2R2											5x11	18
3.3	3R3											5x11	22
4.7	4R7											5x11	27
10	100											5x11	39
22	220							5x11	50	6.3x11	60	6.3x11	65
33	330					5x11	57	6.3x11	70	6.3x11	75	8x11.5	93
47	470		5x11	60	6.3x11	74	6.3x11	85	8x11.5	101	8x11.5	111	
100	101		6.3x11	99	8x11.5	128	8x11.5	140	10x12.5	176	10x16	215	
220	221		8x11.5	170	10x12.5	226	10x16	260	10x20	320	12.5x20	390	
330	331		10x12.5	247	10x16	309	10x20	351	12.5x20	446	12.5x20	488	
470	471	10x12.5	270	10x16	330	10x20	406	12.5x20	476	12.5x25	590	16x25	650
1000	102	10x20	485	12.5x20	601	12.5x25	723	16x25	854	16x25	1060	16x31.5	1143
2200	222	12.5x25	867	16x25	1047	16x25	1290	16x35.5	1570	18x35.5	1840		
3300	332	16x25	1135	16x31.5	1520	16x35.5	1720	18x40	1794				
4700	472	16x31.5	1431	16x35.5	1840	18x35.5	2140						
6800	682	18x35.5	1810	18x40	2049								
10000	103	18x40	2100										

Cap.(μ F)	V	63		80		100	
		Code	1J	Code	1K	Code	2A
0.1	0R1					5x11	2.3
0.22	R22					5x11	5.5
0.33	R33					5x11	8.0
0.47	R47					5x11	10
1	010					5x11	15
2.2	2R2					5x11	22
3.3	3R3					5x11	27
4.7	4R7					5x11	36
10	100	6.3x11	50	6.3x11	55	8x11.5	65
22	220	8x11.5	85	8x11.5	100	10x12.5	110
33	330	8x11.5	105	10x12.5	130	10x16	150
47	470	10x12.5	140	10x16	170	10x20	190
100	101	10x20	255	12.5x20	270	12.5x20	300
220	221	12.5x20	420	12.5x25	490	16x25	549
330	331	12.5x25	541	16x31.5	650	16x31.5	734
470	471	16x25	840	16x35.5	920	18x35.5	980
1000	102	18x35.5	1400			Case size $\phi D \times L$ (mm)	Rated ripple

Rated ripple current (mA rms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

Cap.(μ F)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
	0.1 to 47	0.75	1.00	1.35	1.57	2.00
100 to 470	0.80	1.00	1.23	1.34	1.50	
1000 to 10000	0.85	1.00	1.10	1.13	1.15	