HLG-320H series






- · Built-in active PFC function
- High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 5 years warranty (Note.10)




















HLG-320H-12 A Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- $C: Terminal\ block\ for\ I/O\ connection.\ Output\ voltage\ and\ constant\ current\ level\ can\ be\ adjusted\ through\ internal\ constant\ current\ level\ can\ be\ adjusted\ constant\ current\ level\ constant\ current\ constant\ constant\ current\ constant\ c$
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION

CONSTANT CURRENT REGION Note.4 6 ~12V 7.5 ~15V 10 ~20V 12 ~24V 15 ~30V 18 ~36V 21 ~42V 2	48V 24 ~ 48V 6.7A 321.6W 250mVp-p 43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%	54V 27 ~ 54V 5.95A 321.3W 350mVp-p 49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%											
RATED CURRENT 22A 19A 15A 13.34A 10.7A 8.9A 7.65A 6 6 6 6 6 6 6 6 6	6.7A 321.6W 250mVp-p 43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%	5.95A 321.3W 350mVp-p 49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%											
RATED POWER 264W 285W 300W 320.16W 321W 320.4W 321.3W 321	321.6W 250mVp-p 43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%	321.3W 350mVp-p 49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%											
RIPPLE & NOISE (max.) Note.2 150mVp-p 150mVp-p 150mVp-p 150mVp-p 200mVp-p 250mVp-p	250mVp-p 43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%	350mVp-p 49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%											
VOLTAGE ADJ. RANGE No te.6 10.8 ~ 13.5V 13.5 ~ 17V 17 ~ 22V 21 ~ 26V 26 ~ 32V 32 ~ 39V 38 ~ 45V 4 CURRENT ADJ. RANGE Can be adjusted by internal potentiometer A type and C type only VOLTAGE TOLERANCE Note.3 ±3.0% ±2.0% ±1.5% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±0.5% <th>43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%</th> <th>49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%</th>	43 ~ 52V 3.35 ~ 6.7A ±1.0% ±0.5%	49 ~ 58V 2.97 ~ 5.95A ±1.0% ±0.5%											
CURRENT ADJ. RANGE Can be adjusted by internal potentiometer A type and C type only VOLTAGE TOLERANCE Note.3 ±3.0% ±2.0% ±1.5% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±0.5% ±0.	3.35 ~ 6.7A ±1.0% ±0.5%	2.97 ~ 5.95A ±1.0% ±0.5%											
CURRENT ADJ. RANGE 11 ~ 22A 9.5 ~ 19A 7.5 ~ 15A 6.67 ~ 13.34A 5.35 ~ 10.7A 4.45 ~ 8.9A 3.8 ~ 7.65A 3 VOLTAGE TOLERANCE Note.3 ±3.0% ±2.0% ±1.5% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±0.5%	±1.0% ±0.5%	±1.0% ±0.5%											
CURRENT ADJ. RANGE 11 ~ 22A 9.5 ~ 19A 7.5 ~ 15A 6.67 ~ 13.34A 5.35 ~ 10.7A 4.45 ~ 8.9A 3.8 ~ 7.65A 3 VOLTAGE TOLERANCE Note.3 ±3.0% ±2.0% ±1.5% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±0.5%<	±1.0% ±0.5%	±1.0% ±0.5%											
LINE REGULATION ±0.5%	±0.5%	±0.5%											
LOAD REGULATION ±2.0% ±1.5% ±1.0% ±0.5% ±0													
SETUP, RISE TIME Note.8 2500ms, 80ms at full load 230VAC /115VAC HOLD UP TIME (Typ.) 15ms at full load 230VAC /115VAC VOLTAGE RANGE Note.5 90 ~ 305VAC 127 ~ 431VDC FREQUENCY RANGE 47 ~ 63Hz	±0.5%	±0.5%											
HOLD UP TIME (Typ.) 15ms at full load 230VAC /115VAC VOLTAGE RANGE Note.5 90 ~ 305VAC 127 ~ 431VDC FREQUENCY RANGE 47 ~ 63Hz													
VOLTAGE RANGE Note.5 90 ~ 305VAC 127 ~ 431VDC FREQUENCY RANGE 47 ~ 63Hz													
FREQUENCY RANGE 47 ~ 63Hz													
POWER FACTOR (Typ.) PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristics")													
	acteristic" curv	re)											
TOTAL HARMONIC DISTORTION THD< 20% when output loading ≥ 50% at 115VAC/230VAC input and output loading ≥ 75% at 277VA		,											
	95%	95%											
	95%	95%											
AC CURRENT (Typ.) 3.5A/115VAC 1.65A/230VAC 1.45A/277VAC	0070	0070											
	3.5A7 115VAC 1.65A7 23UVAC 1.45A7 277 VAC COLD START 70A(twidth=1010 \(\mu \)s measured at 50% \(\text{logat} \)) at 230VAC												
	COLD START 70A(twdth=1010 //s measured at 50% lpeak) at 230VAC <0.75mA / 277VAC												
OVER CURRENT Note.4	95 ~ 108%												
	Protection type: Constant current limiting, recovers automatically after fault condition is removed Hickup mode, recovers automatically after fault condition is removed.												
	Hiccup mode, recovers automatically after fault condition is removed. 14 ~ 17V												
OVED VOLTAGE													
	Protection type : Shut down and latch off o/p voltage, re-power on to recover												
OVED TEMPEDATIDE	100°C ±10°C (RTH2)												
10 700 (7.4) 17 11 11 11	Protection type: Shut down and latch off o/p voltage, re-power on to recover												
	-40 ~ +70°C (Refer to "Derating Curve") 20 ~ 95% RH non-condensing												
· · · · · · · · · · · · · · · · · · ·	20 ~ 95% RH non-condensing												
	-40 ~ +80°C, 10 ~ 95% RH												
	±0.03%°C (0~50°C)												
	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes												
SAFFTY STANDARDS Note 7	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent (except for HLG-320H C type), IP65 or IP67, J61347-1,												
J61347-2-13 approved													
SAFETY & WITHSTAND VOLTAGE I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC													
EMC ISOLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH													
EMC EMISSION Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load); EN61000	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3												
EMC IMMUNITY Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria	а В												
MTBF 157.1K hrs min. MIL-HDBK-217F (25°C)													
OTHERS DIMENSION 252*90*43.8mm (L*W*H)													
PACKING 1.88Kg; 8pcs/16Kg/0.92CUFT													
 Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capa 3. Tolerance: includes set up tolerance, line regulation and load regulation. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related reconfirm special electrical requirements for some specific system design. Derating may be needed under low input voltages. Please check the static characteristics for more details. A type and C type only. Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 	4. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. A type and C type only. 7. Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18. 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the												




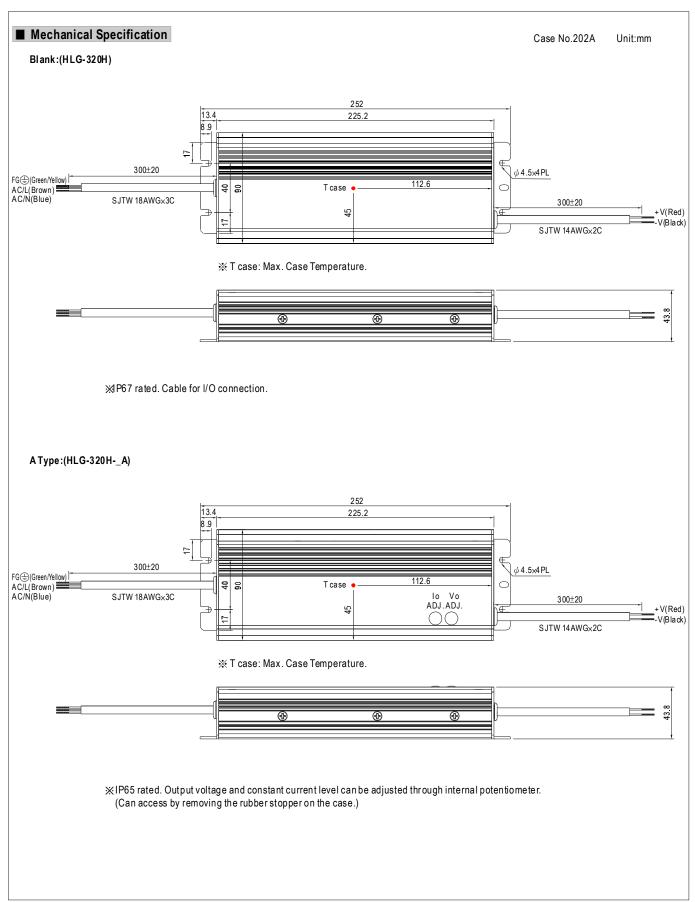




B Type:(HLG-320H-_B) 252 225.2 φ4.5×4PL 300±20 FG (Green/Yellow) AC/L(Brown) AC/N(Blue) 300±20 40 90 Tcase DIM+ (Blue) SJTW 18AWG×3C DIM-(White) SJTW 18AWG×2C 45 +V(Red) -V(Black) SJTW 14AWG×2C ※ T case: Max. Case Temperature. **(1**) **(**

C Type:(HLG-320H-_C)

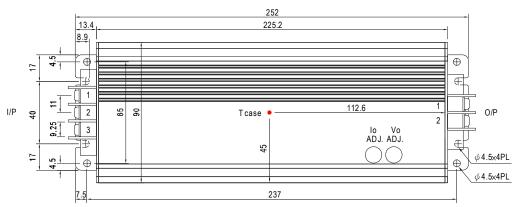

※ T case: Max. Case Temperature.



XOutput voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	FG ±
2	AC/L
3	AC/N

DC Output Terminal Pin No. Assignment


Pin No.	Assignment
1	+ V
2	-V



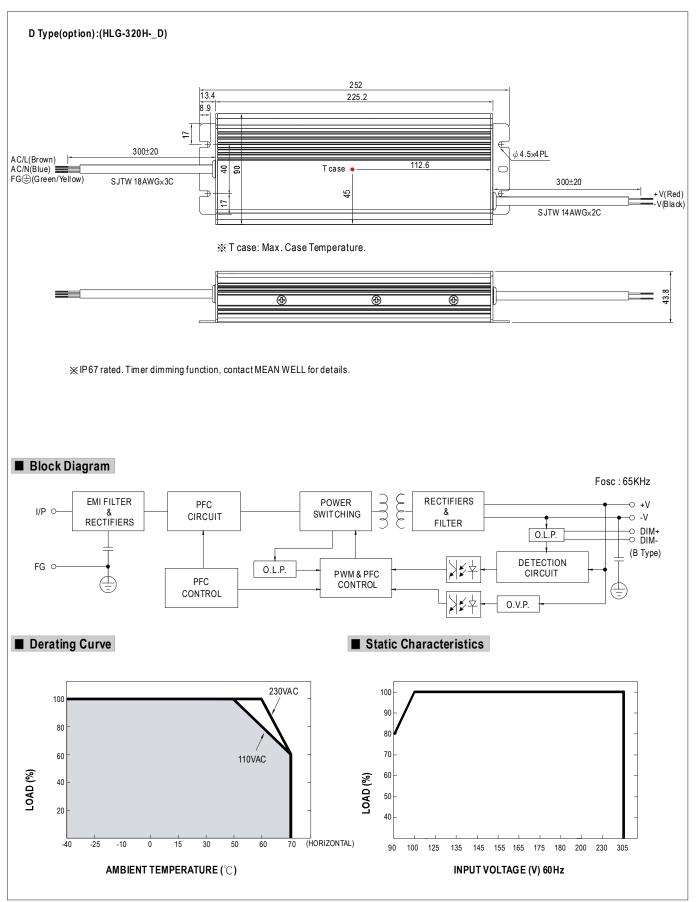




■ Power Factor Characteristic

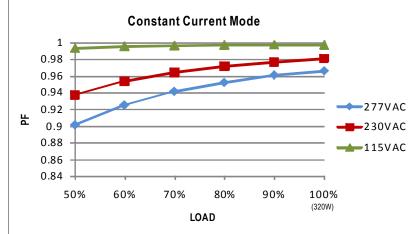

■ EFFICIENCY vs LOAD (48V Model)

HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

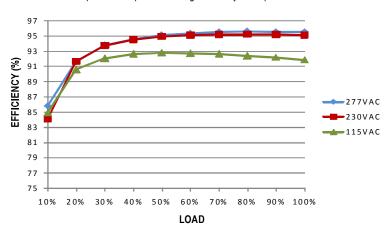


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

 $A typical \, LED \, power \, supply \, may \, either \, work \, in \, "constant \, voltage \, mode \, (CV) \, or \, constant \, current \, mode \, (CC)" \, to \, drive \, the \, LEDs.$

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

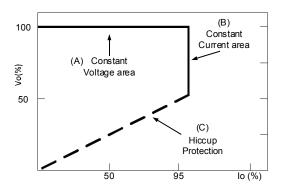

Typical LED power supply I-V curve



FG⊕(Green/Yellow) AC/L(Brown) HLG-320H DIM+(Blue) DIM+(Blue) HLG-320H

- X Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90ΚΩ	100K Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20K Ω/N	30K Ω/N	40K Ω/N	50K Ω/N	60K Ω/N	70KΩ/N	80KΩ <i>I</i> N	90KΩ/N	100KΩ/N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10 V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


× 10V PWM signal for output current adjustment (Typical): Frequency range: 100 HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

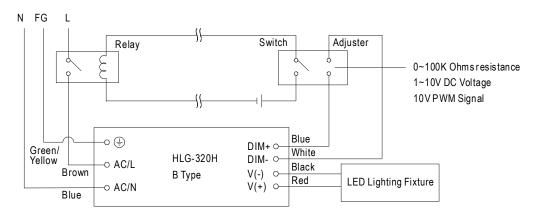

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2.The LED lighting fixture can be turned ON/OFF by the switch.




■ WATERPROOF CONNECTION

Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-320H to operate in dry/wet/damp or outdoor environment.

Suitable Current

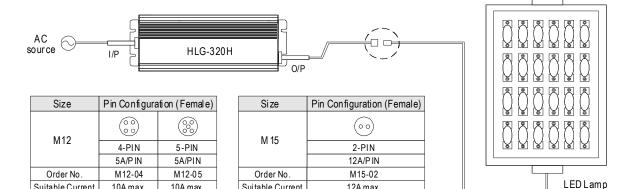


O Cable Joiner

Suitable Current

10A max

10A max

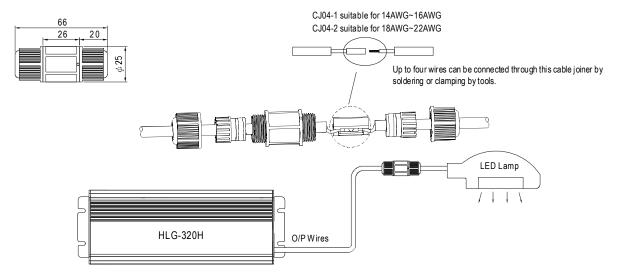

12A max

XCJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL or der No.: CJ 04-1, CJ 04-2.

